

# MediaPOINTE DMR300

## Digital Media Recorder



The award winning DMR300 records three separate streams, each in their native resolution to preserve content clarity. Each input is recorded direct from the source removing unwanted noise and outages which are the problems with network based recorders. Ten user selectable templates are included to accommodate any kind of audience or display, be it 4 X 3 Picture In Picture or 16 X 9 Picture Out of Picture. The DMR300 can record and stream up to 30 fps of XGA and video with CD-quality stereo audio performance. The HD ready DMR300 also incorporates MediaPOINTE's *CopyMe!* technology allowing content to be immediately delivered via USB flash drive.

### Product Highlights


- MediaPOINTE's *CopyMe!* flash drive distribution
- HD ready
- Record up to three simultaneous inputs
- User selectable templates
- RS-232 control for integration

### Applications

- Education - Interactive training with Hi-Res content
- Healthcare - CME training
- Videoconferencing - Near end / far end camera view & Hi-Res data
- Public Safety - Alerts & announcements with graphical content

# SPECIFICATIONS

## MediaPOINTE DMR300

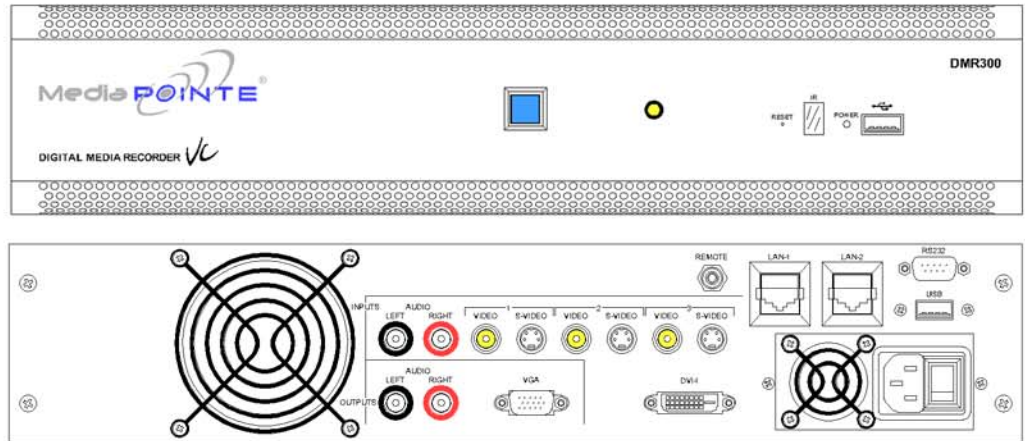

### Features

- Record up to three simultaneous feeds in native resolution.
- HD resolutions
- Live playback while recording
- Up to 400 hours of recording time
- 10 recording templates
- Local playback, download and network streaming
- Content titling / watermark
- Test graphics and tones
- Content offload to USB flash drive
- Email notifications
- Automated Tandberg functionality

### Graphics Resolution

- VGA, SVGA, XGA
- SXGA, WXGA, and UXGA scale to XGA

### Video Format

- NTSC, PAL

### Video Input

- 3 S-Video (Minidin) - 1 for future use
- 3 Composite Video (RCA) - 1 for future use
- 1 DVI-I

### Video Output

- 1 VGA 15-Pin HD

### Audio Input

- 2 Audio left & right (RCA)

### Audio Output

- 2 Audio left & right (RCA)

### Protocols

- TCP/IP, UDP, DHCP, SMTP, HTTP, FTP

### Connectivity

- 1 LAN/Ethernet 10/100 MB (RJ-45)
- 1 LAN/Gigabit Ethernet 10/100/1000 (RJ-45)
- 1 Serial DTE RS-232 (9-pin male)
- 3.5mm TTL Contact Closure
- 2 USB 2.0

### Control

- Push-button
- Remote relay closure
- RS-232 serial port
- Web interface
- Infrared
- XML API

### Physical

- 19" x 3.5" x 14"
- 20 Lbs.

### Power

- Universal 100-240 V A/C 50/60 Hz Internal power supply

Phone: 805-376-1740

Fax: 805-480-3770

Email: [info@mediapointe.com](mailto:info@mediapointe.com)

web: [www.mediapointe.com](http://www.mediapointe.com)

Advanced Media Design  
667 Rancho Conejo Blvd.  
Newbury Park, CA 91320