
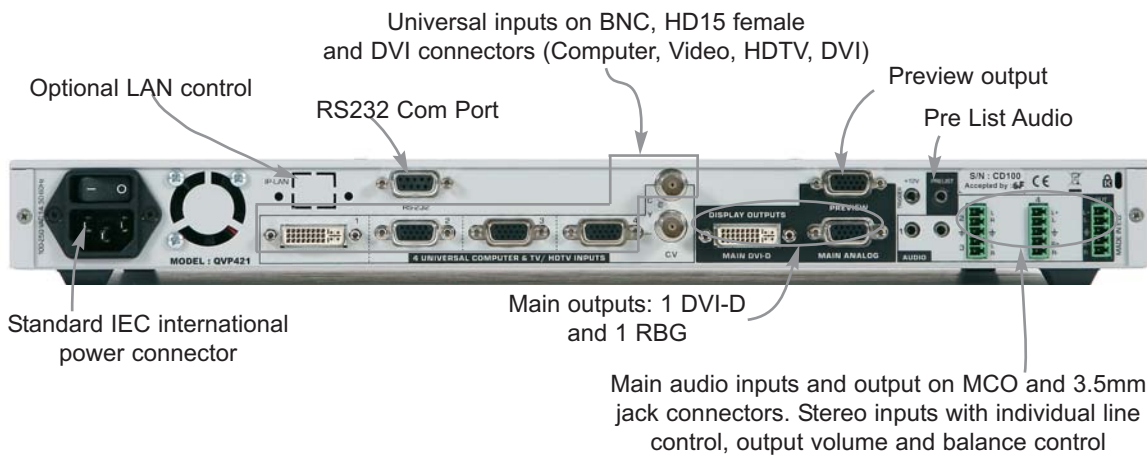
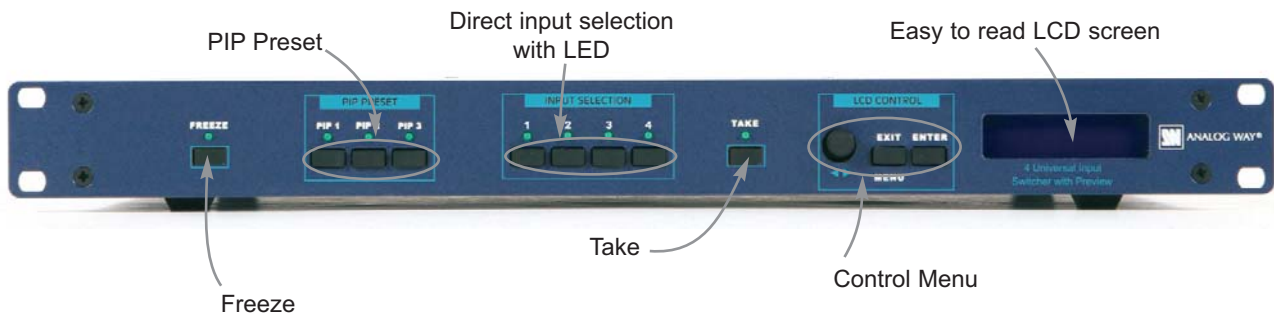


Quattro Vue™

HD Seamless Switcher for Conference Rooms, Houses of Worship and Large Screen Projections

New!

Model. QVP421

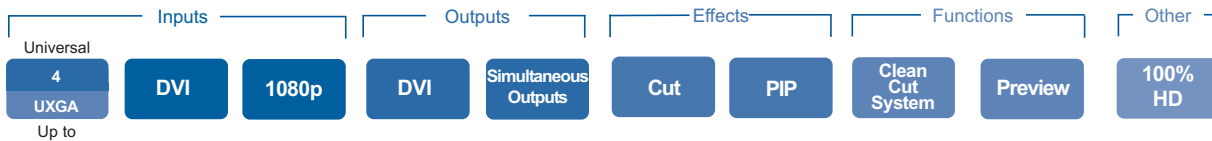

Inputs

- Analog and Digital Inputs/Outputs up to 1080p
- 4 universal inputs with DVI
- Computer and DVI up to UXGA / 1080p
- Video: NTSC/PAL/SECAM, S. Video, YUV, RGB, HDTV
- Stereo Audio with level adjustment for each input

Outputs

- Main: 1 DVI-D + 1 RGB up to UXGA / 1080p
- Preview: XGA RGBHV
- Audio Stereo Main and Pre-List with level adjustment

Effects

- Scaled Preview and Hi-Res. Picture in Picture
- Seamless and Clean Cut
- Ultra fast and smooth switching



ANALOG WAY®

www.analogway.com

P/N : QVP421/B1107-VA

Seamless Switchers

Technical Specifications

4 Universal Inputs

- **Composite Video** NTSC = 15.735 kHz/60 Hz
PAL/SECAM = 15.625 kHz/50Hz
- **S.Video (Y/C)** NTSC = 15.735 kHz
PAL/SECAM = 15.625 kHz/50Hz
15.625 kHz/50 Hz – 625L
15.735 kHz/60 Hz – 525L
- **Component (YUV)** RGBsB (SOG: 0.3V Analog),
15.625 kHz/50 Hz - 625L, 15.735 kHz/ 60 Hz - 525L
- **HDTV:** Component (HDYUV 2/3 Level Sync.) 1080i/60-50Hz,
720p/60-50Hz, 480p/60Hz
- **Computer** (RGB HV, RGB/S and RGsB): PC, Mac, Workstation.
Automatic Sync. & centering. Resolution from 640x480 to
1600x1200 (up to 110kHz)
- **DVI:** Digital computer up to 1600x1200 RB/60Hz and
1920x1080/60Hz (Fpx: 165MHz max)

Audio Inputs

4 Stereo Inputs

- 1 balanced audio input
- 3 unbalanced audio inputs
- $V_i = +18$ dBu max
- $Z_i = 20$ kOhms unbalanced
- $Z_i = 40$ kOhms balanced
- Gain: adjustable

Main Display Output

- 1 x output (1 on HD15 F connector, RGB HV, RGB/S or RGsB
selectable (H&V separated, Sync. Composite or SOG), RGB=
0.7Vp/p (75 Ohms)
- 1 x DVI-D on DVI-I connector
- Resolution: 4/3 & 5/4 = SVGA, XGA, SXGA+, UXGA,
16/9 & 16/10 = WVGA, WWSGA, WXGA, WSXGA, WSXGA+, 1080p
- Rate: Internal 50, 60, 72(*) & 75(*) Hz and Follow
(*) depending on resolution

Preview Display Output

- 1 x RGB HV separated Sync - RGB = 0.7V p/p (75 Ohms),
resolution: XGA, Rate: 60Hz

Main Audio Output

- Stereo output (balanced & unbalanced)
- $V_o = +18$ dBu max - $Z_o = 300$ Ohms (unbalanced)
- $V_o = +24$ dBu max - $Z_o = 600$ Ohms (balanced)
- $G = 0$ dB nominal, with volume

Prelist Audio Output

- Stereo output unbalanced
- $V_o = +18$ dBu max

User Controls and Connectors

- $Z_s = 300$ Ohms
- $G = 0$ dB nominal, with master volume

FRONT PANEL

- Selection of inputs 1 to 4
- Programmable effect keys
- Freeze, Take
- LCD window & control buttons for menu: Test patterns, proc.
image adjust., input format selection, output format display, output
format & sync., audio input level and output, volume adjustments,
position & size adjustments, front panel control lockout

REAR PANEL

Input Connectors:

- Input #1: DVI-I
- Inputs #2 and #3: HD 15F
- Input #4: HD 15F + 2 BNC
- Audio inputs 2 to 4: on 5-pin screw terminal
- Audio input 1: on 3.5 jack stereo

Output Connectors:

- Main Video: DVI-I + HD 15F
- Preview Video: HD 15F
- Main Audio: 5-pin screw terminal
- Prelist Audio: Jack Stereo 3.5

Other:

- 1 x DB9F with 2 RS232 ports
- 1 x Jack 3.5: +12Vdc trigger
- Optional Ethernet Port 10/100BT: RJ45

Power Supply

- Internal, universal, automatic, 100-250, VAC;50/60 Hz (50 W) (UL,
CSA, GS, CE), ON/OFF AC Main Switch

Supplied with

- 1 x Power cable
- 1 x Set of 3 audio 5-pin screw terminals
- 1 x DVI-VGA adapter
- 1 x HD15F-5BNC adapter cable of 0.5m (1.5ft)
- 1 x Remote control software
- 1 x User Manual

Dimensions: 19", 1U Compatible

- D 10.4" x W 19" x H 1.74"
- D 265 mm x W 482 mm x H 44 mm

Weight: 3.5 kg (7.7 lbs)

Warranty

- 3 year warranty on parts and labor back to factory

USA, Canada, South America and The Carribeans

ANALOG WAY Inc.
Tel. 212 269 1902
Fax. 212 269 1943
Email: salesusa@analogway.com

Europe, Africa and Middle-East

ANALOG WAY FRANCE
Tel. 331 64 47 16 03
Fax. 331 64 47 14 73
Email: saleseuro@analogway.com

Asia and Asia Pacific

ANALOG WAY Pte Ltd
Tel.: 65 62 92 58 00
Fax.: 65 62 92 52 05
Email: sales@analogwayasia.com

Quattro Vue™ by Analog Way is a **High Resolution Digital and Analog, Computer & Video Scaler Seamless Switcher**. In addition, **QVP 421** offers a true scaled preview and effects including **High Resolution PIP** for Computer & Video formats.

QVP 421 is fitted with 4 Universal A/V inputs including one DVI, and 3 outputs: 1 Analog, 1 DVI for the Main and 1 Analog for the Preview. It performs an ultra fast and smooth transition between any Video or Computer sources. It also allows true seamless switching between one computer Input (direct) and any other Video or Computer Input.

Preview: **QVP 421** is fitted with a true scaled Preview out offering the facility to visualize any source before displaying it on the Main output. Preview out ensures easy and safe presentations since any Video or Computer source can be checked on a simple LCD screen before being shown to the audience.

PIP: **QVP 421** creates High Quality picture insertion from any input. The PIP can be smoothly sized and moved anywhere over the background image. The PIP source can be fast & smoothly switched through a fade to black or customized color. The PIP opening offers a choice between Cut and Fade.

QVP 421 is a **High Performance State of the Art Up/Down Video and Computer Scaler**. Ready to fit the native resolution of the latest HD display devices, it provides a high quality image thanks to its high quality digital decoder, improved 3:2 and 2:2 pull down circuitry, auto-adaptative pixel by pixel 3D motion compensation, time base corrector, frame rate converter & follower.

Easy to use, **QVP 421** offers an Auto Setup function and a powerful Auto Clock & Phase for Computers. Each input image control - brightness, contrast, color, hue, processing, aspect ratio, zoom, etc ... - can be individually set and stored in non volatile memories.

Each of the 4 Inputs is fitted with a stereo audio line. The audio can either follow or break away from the Video image. **QVP 421** is fitted with a Dual RS232 Com port for Integral remote control and automatic control of other devices in the installation. Field upgradeable firmware maintains the high value of your equipment. Upgrades are available on the **Analog Way** web site. An optional TCP/IP connection allows for remote control and/or upgrade.

This ultra compact and user friendly device is designed for high resolution A/V presentation displays, Houses of Worship, conference and boardrooms, and events.

To Control Quattro Vue

- **RKD500-T:** Remote console with T-Bar
- **RKD500:** Remote console
- **RKD100:** Remote console
- **Axion:** High End Remote controller



Axion



RKD500-T



RKD100

Specifications subject to change without prior notice

ANALOG WAY

References

> **QVP421:** QUATTRO VUE with RS232 com port

- **RKD500-T*:** Remote control console with T-Bar
- **RKD500*:** Remote control console
- **RKD100*:** Remote control keypad

* : sold separately

Option

- **OPT-LAN:** Optional TCP/IP control interface

Cables for Quattro Vue

- S.Video Cables from 1.8m/6ft to 20m/66ft
- S. Video to BNC Cables of 1.8m/6ft and 5m/16ft
- RCA Cable of 1.2m/4ft
- RCA / BNC Adapter Cables
- Jack Stereo Cable of 1.2m/4ft
- Audio Stereo Cable of 1.2m/4ft
- VGA Cables from 0.4m/1ft to 1.8m/6ft
- VGA/BNC adapter Cables of 1.8m/6ft and 3m/10ft
- Remote Cables from 0.5m/1ft to 30m/100ft