

TripliX™

TripliX™


Model. TRC8022

- Event Remote Console for **Di-VentiX**, **CentriX**, **EventiX**, **NatiX**
- For the Control of up to 3 **iX** Seamless Switchers
- Compact, User-friendly and Easy to Connect Device

TripliX™ allows to simultaneously or independently control up to 3 units of the powerful **iX** range Seamless Switchers: **Di-VentiX**, **EventiX**, **CentriX** and **NatiX**.

Up to 24 sources can be displayed on 3 screens (6 in matrix mode). All the sequences and effects of the **iX** Range (cut, fade, titling, PIP and wipe) can be synchronized or separately activated, automatically or with the T-Bar.

TripliX is compact, easy to use and to connect, and designed to be integrated in any 19" rack control room. The combination of **TripliX** and an **iX** Seamless Switcher can be used together with **Show Manager Open Edition** and/or **Cross Blender** for spectacular wide screen presentations.

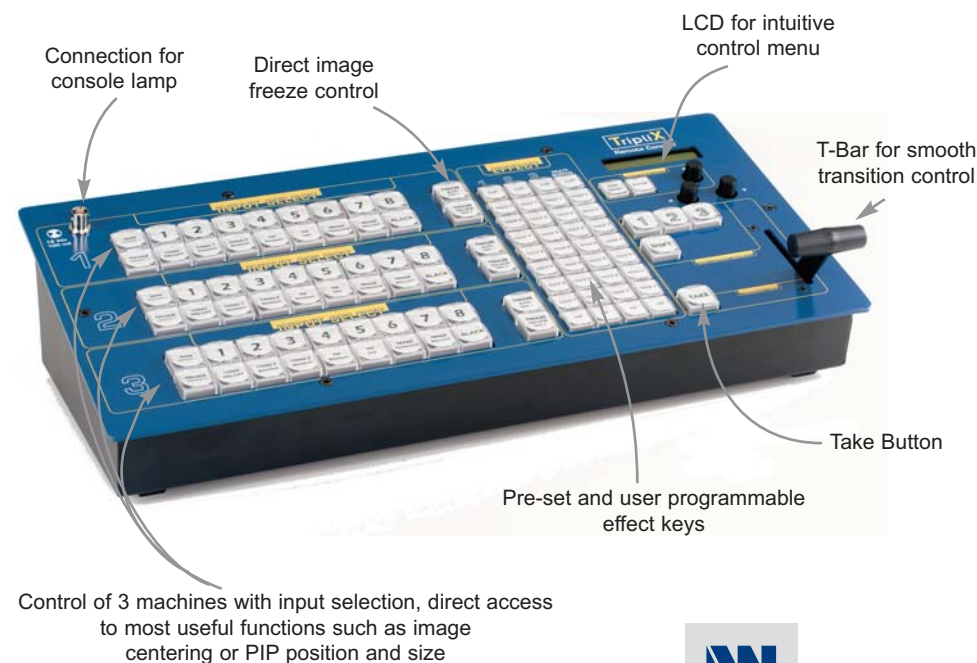

Technical Specifications

LCD Window and Control Buttons for

- Input format status
- Output format & sync. selection
- Switching effect transition
- Contrast and black level, RGB, color, hue, brightness, sharpness and gamma adjustments
- Test patterns
- Front panel & control key lock out

Input Connectors

3 x RS232 connectors (DB9 male) to connect up to 3 iX range products

Dimensions: 5U, 19"

- D 220 mm x W 446 mm x H 120 mm
- D 8.7" x W 17.5" x H 4.7"

Weight: 4 kg / 8.8 lbs

Power Supply

Internal, universal, automatic, 100 - 250 VAC; 50/60 Hz (25W) (UL, CSA, CE, IEC 950)

Supplied with

- 1 x AC power cable
- 3 x Remote cables DB9 (M/F) (3m/10 ft)
- 1 x Update cable DB9 (F/F) (1.8m/6 ft)
- 1 x User manual

Warranty

3 year warranty on parts and labor, back to factory

Specifications subject to change without prior notice

Reference

> **TRC8022**: TripliX™

For the control of

- > **Di-VentiX** - DVX8022
- > **EventiX** - EVX8022
- > **CentriX** - CTX8022
- > **NatiX** - NTX8022