

4040CL- CLIP FAST ACCESS SYSTEM



OVERVIEW

- Fast access to video clips: enter cue point number, then load
- Fast access to fill clip & key clip combinations
- Control up to 6 channels

FEATURES

- Control up to 6 video channels individually or ganged
- Access fill clip/key clips from a single cue point
- Learn 400 registers (or cue points) which contain single or multiple clips
- Quickly and easily re-assign cue points
- View all available clips in server
- Trim clips (protocol dependent)
- Loop clips (protocol dependent)

PROTOCOL

- Louth
- Odetics

MODEL NUMBER

- 4000CL-L
- 4000CL-O


OPTIONS

- P BIO (Production switcher interface)
- K BIO (Keyboard interface option)
- T Bar

SPECIFICATIONS

- Components:
 - ST400-SSM with Clip Software
 - (a) Display: 30 line x 40 character backlit LCD
 - (b) Power: 90 VAC to 265 VAC adapter with IEC connector
 - (c) Size: 12 3/4" x 8" x 1 3/4" (front)
3 5/8" (rear)
 - (d) Weight: 10 lbs.
 - (e) Jog/Shuttle: With mechanical detents

INTERFACE

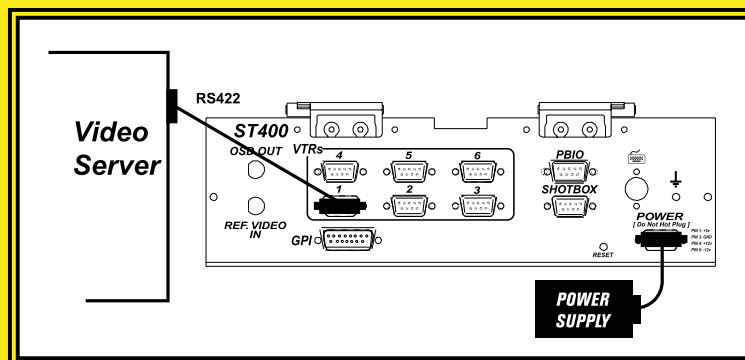

p.818.898.3380