


VM-80A

1:8 AUDIO DISTRIBUTION AMPLIFIER



The Kramer VM-80A is a high performance distribution amplifier for balanced stereo audio signals. It can be configured as two 1:4 DAs.

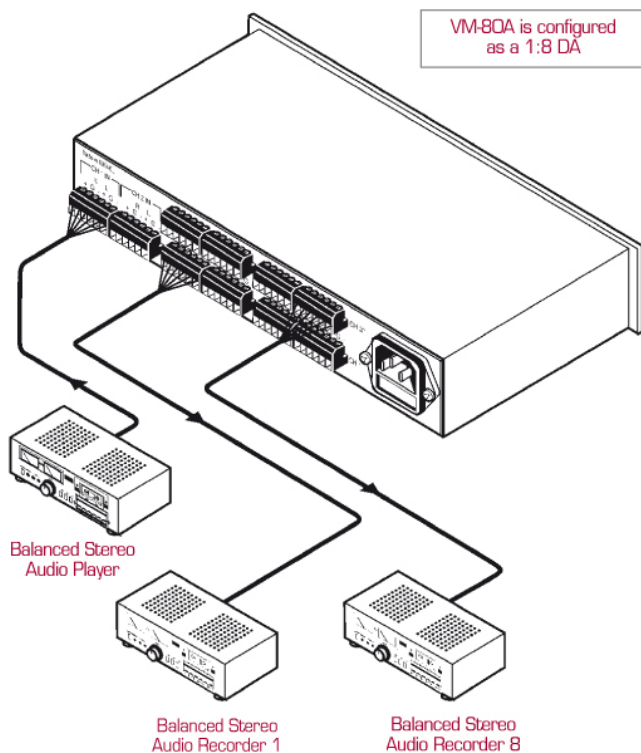

DESCRIPTION

- Dual Mode - Configure as either a 1:8 or (2) 1:4 DAs.
- S/N Ratio - 100dB (1V).
- Grouped Audio Level (Gain) Controls.
- Desktop Size - Compact size. Two units can be rack mounted side-by-side in a 1U rack space with the optional RK-80 adapter.

SPECIFICATIONS

INPUTS:	2 balanced audio stereo +4dBm, 100 kΩ on terminal block connectors.
OUTPUTS:	2 x 4 balanced audio stereo, +4dBm, 50Ω on terminal block connectors.
MAX. AUDIO OUTPUT:	20 Vpp.
AUDIO BANDWIDTH (-3DB):	20kHz.
S/N RATIO:	100dB/1V.
CROSSTALK:	-60dB.
COUPLING:	AC.
THD+NOISE:	0.02%.
POWER SOURCE:	230 VAC, 50/60 Hz (115VAC U.S.A.) 6.7 VA.
DIMENSIONS:	22cm x 18cm x 4.5cm (8.7" x 7" x 1.8", W, D, H., half 19").
WEIGHT:	1.2 kg. (2.7 lbs.) approx.
ACCESSORIES:	Detachable AC power cord.
OPTIONS:	RK-80 rack kit.