




### MR

### MONITOR RING DISPLAY SYSTEM

***Monitor Ring Suspension Systems Include:***

- A. 1/2 - 13 x 36" all-thread rod.
- B. 1-1/4" pipe clamp (**MRASCR**).
- C. Monitor ring assembly.
- D. **ACM2030** ceiling mounts.
- E. 18" x 1-1/4" I.D. schedule 40 pipe.
- F. U-bolt dogbone flange (**CMAUDB**).

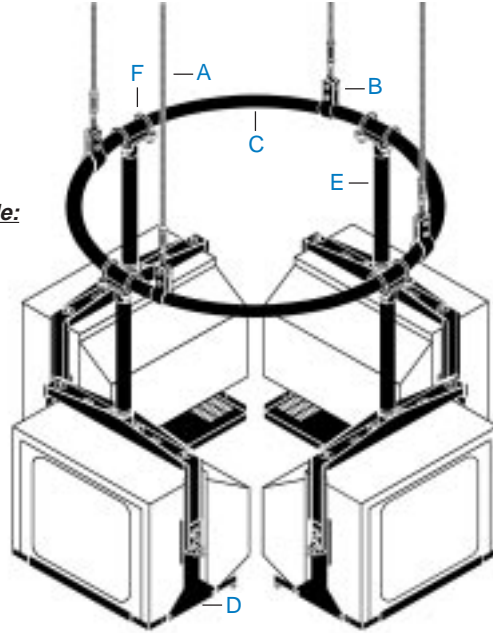

MODEL	RING diameter	ACM Size	QUANTITY	TV Width	BLACK WRINKLE	SHIP. WT. (lbs)
<b>MR44ACM3</b>	44"	ACM2030	3	20" to 30"	•	210
<b>MR44ACM4</b>	44"	ACM2030	4	20" to 25"	•	230
<b>MR60ACM4</b>	60"	ACM2030	4	20" to 30"	•	350
<b>MR60ACM5</b>	60"	ACM2030	5	20" to 30"	•	375
<b>MR60ACM6</b>	60"	ACM2030	6	20" to 25"	•	400
<b>MS60ACM4*</b>	60"	ACM2030	4	20" to 30"	•	350
<b>MS60ACM6*</b>	60"	ACM2030	6	20" to 25"	•	375

\* Split ring

**NOTES:**

- Custom configurations including #**CMAH** Hoist option available.  
*Lack of space prohibits listing every possible ACM size, ring diameter or other variation.*
- Drop from ceiling varies with monitor height. Drop can be increased or decreased with substitutions for the 18" pipe (E) or all-thread rods (A).
- Order **MS** split ring for column, pillar or post wraparound applications.
- Safety strap included.
- See **Ceiling Mount Accessories** for special hardware and accessories.

1-800-LUCASEY