


The Biggest Thing in Big LCD Monitors

LCD-2007HD LCD-2007HDL LCD-2007HDT LCD-2007HDTL

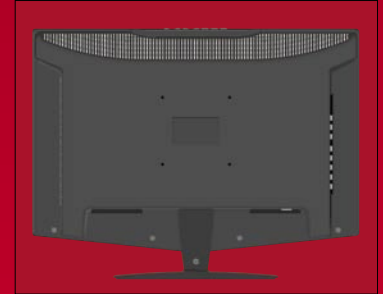

Active Matrix 20" Color LCD Monitor

• HD compatible (supports 480p/i, 576p/i, 720p, 1080i)

- Component input capability provides superior viewing pleasure
- Aspect ratio: 16:9
- Anti-glare hard coating covers glass surface
- Zoom function
- Wireless remote control
- Dual built-in front speakers for easy listening
- For color and B&W applications
- Low power consumption
- Case made of durable black ABS plastic
- Active matrix technology allows wide viewing angle
- Active matrix technology eliminates distortion
- Switching power supply (AC 90~240V, 50 ~ 60Hz) included
- Built-in removable desk stand included
- Built-in interface and proper cable exiting for wall or arm mounting VESA 100mm FPMPMI compliant
- Response Time: 8ms/8ms (rising/falling)

Perfect for behind-the-mirror applications. Order LCD-2007HDTL
Available 1Q08 with ATSC/NTSC/QAM tuner

Optional Accessories

- HM-400 Under-cabinet hinge mount (shown below)
- WM-31 Wall mount bracket (fixed)
- WM-302 Wall mount with swing arm & 4-way (shown below)
- WMC-1720 Ceiling mount

Resolution: 1366 (H) x 768 (V) dots
Brightness rating: 450 cd/m² (Nit)
Contrast Ratio: 700:1

Display: 20" TFT LCD active matrix
Back Light: Built-in CCFTs
Input Signal: Composite NTSC/PAL (auto sensing for video)
S-Video, component,
Analog RGB
LCD-2700HDT: RF TV Tuner: Cable ready (ATSC/NTSC/QAM), channels 1-125 (Available 4Q07)
Colors: 16.7 M
Number of Pixels: 480,000 dots
Viewing angle L/R/T/B: 80/80/70/70 degrees
Pixel Configuration: Stripe
Video Input Level: 1.0V p-p at 75 Ohm
Audio Input: 400 ± 50mV (rms) at 1 KHz Stereo
Audio Output: 1V P-P
Built-in Speakers: 3 W/ channel x 2
Dimensions w/ desk stand (WHD): 554.8 x 433 x 160mm / 21.8" x 17" x 6.3"
Dimensions w/o desk stand (WHD): 554.8 x 401 x 80mm / 21.8" x 15" x 2.75"
Actual visible screen size (WH): 408 x 306mm / 16" x 12"
Operating temperature: 50 ~ 104°F or 10 ~ 40°C
Storage temperature: -4 ~ 140°F or -20 ~ 60°C
Power Requirement: 100 ~ 240VAC, 50/60Hz, 12 VDC, 7A, negative ground
Power Consumption: 80 W (max)
Connectors: RCA A/V IN jacks, S-Video
RCA YPbPr inputs and RCA R/L audio inputs
15-pin D-sub, PC audio IN
Threaded "F" connector for LCD-2007HDT
2.1mm DC IN jack
Net weight: 5 kg. / 11 lbs.
Gross weight: 6.4 kg. / 14 lbs.

Specifications subject to change without notice

©2008 ToteVision

60K

Available through: